




PedalPCB

ShamWah

Revision 12.25.19

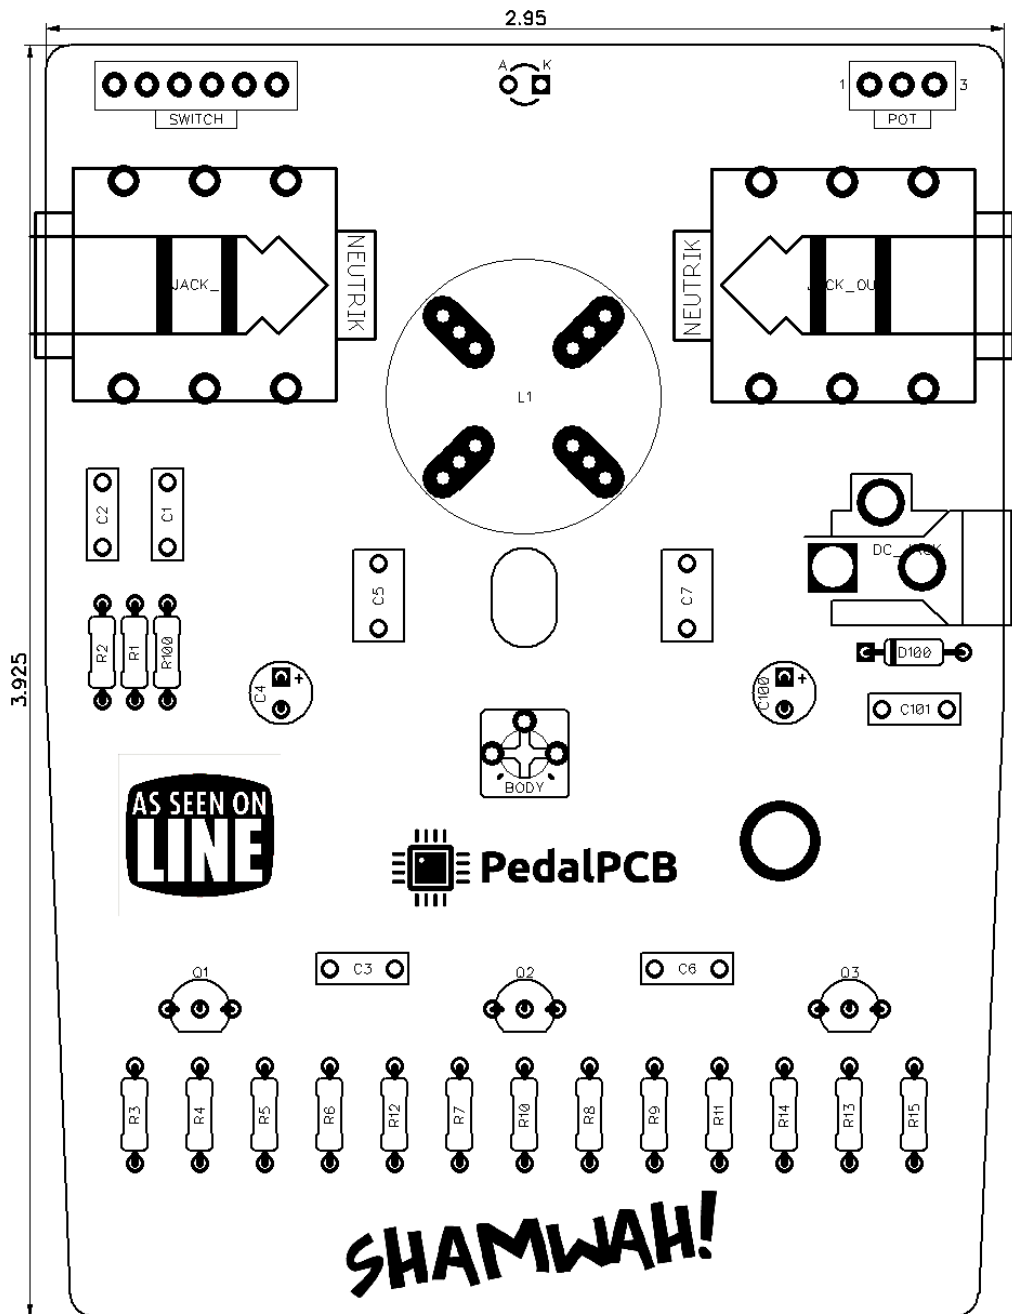

Controls

- Wah Treadle
- Body (Trim Pot)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1	1K
R2	5M6
R3	220K
R4	330K
R5	10K
R6	68K
R7	22K
R8	390R
R9	470K
R10	1K5
R11	100K
R12	10K
R13	470K
R14	1K
R15	10K
R100	4K7

INDUCTORS

L1	600mH
----	-------

CAPACITORS

C1	47n
C2	100p
C3	100n
C4	4u7
C5	220n
C6	10n
C7	220n
C100	220u
C101	100n

SWITCHES

3PDT Footswitch (Latching)

TRANSISTORS

Q1	BC548
Q2	BC548
Q3	BC548

DIODES

D100	1N5817
------	--------

POTENTIOMETERS

WAH	100K
-----	------

TRIM POTS

BODY	50K
------	-----

JACKS (PCB MOUNTED)

DC_JACK 2.1mm Barrel Style DC jack
<https://www.taydaelectronics.com/dc-power-jack-2-1mm-barrel-type-pcb-mount.html>

JACK_IN 6.35mm 1/4" PCB mounted jack
JACK_OUT <https://www.taydaelectronics.com/6-35mm-1-4-stereo-insulated-switched-socket-jack-pcb.html>

ENCLOSURE

Designed for a Crybaby-style enclosure with DC jack
<http://smallbear-electronics.mybigcommerce.com/expression-pedal-shell-kit/>

