




PedalPCB

Boogie Monster

Revision 12.28.19

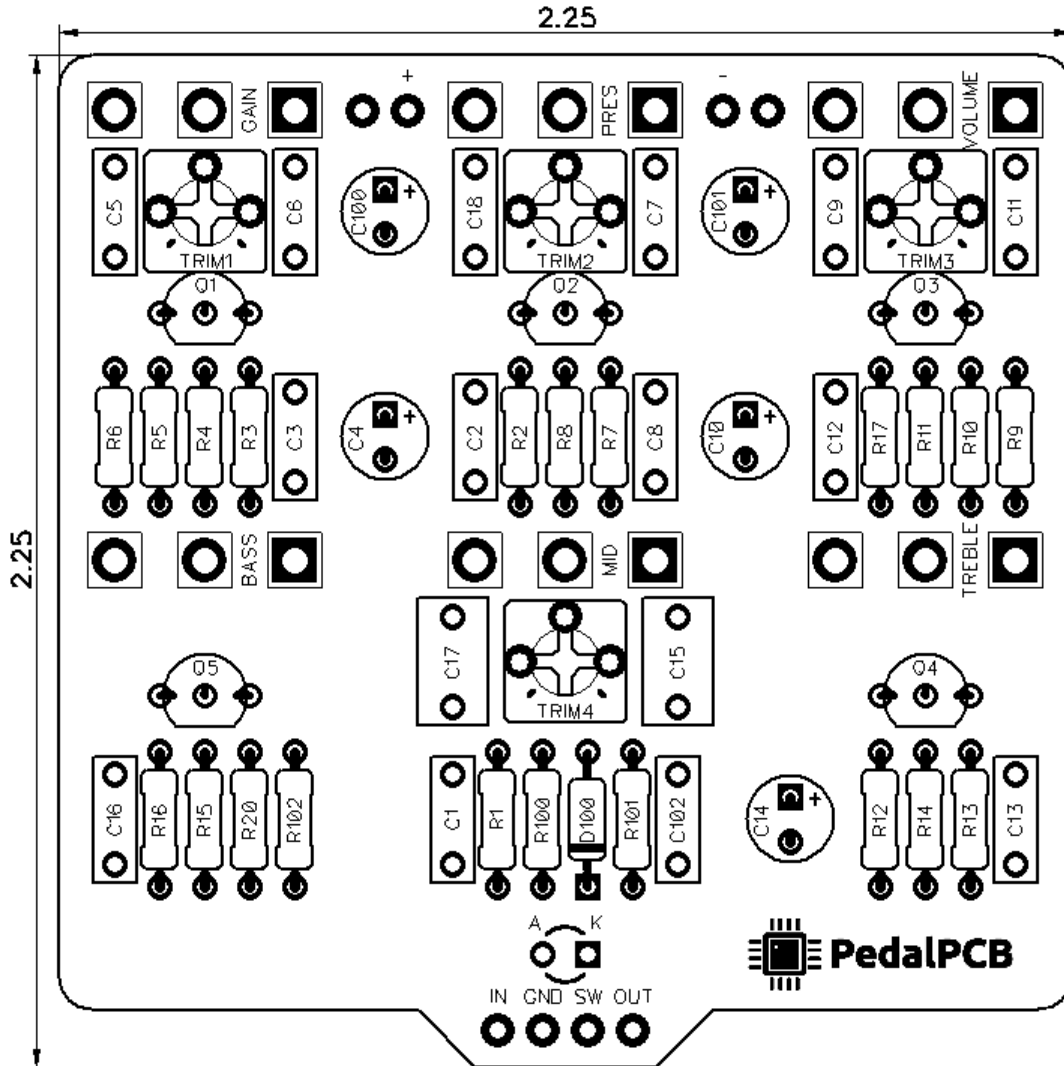

Controls

- Volume
- Presence
- Gain
- Treble
- Mid
- Bass

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

Boogie Monster

Parts List

RESISTORS (1/4W)

R1 2M2
 R2 680K
 R3 68K
 R4 1K8
 R5 2M2
 R6 680K
 R7 680K
 R8 1K8
 R9 470K
 R10 1M
 R11 3K9
 R12 330K
 R13 220K
 R14 1K8
 R15 10K
 R16 10K
 R17 2K2
 R20 5K1
 R100 4K7
 R101 100R
 R102 100R

CAPACITORS

C1 100n
 C2 220p
 C3 22n
 C4 1u
 C5 2n2
 C6 1n
 C7 22p
 C8 220p
 C9 22n
 C10 1u
 C11 1n
 C12 22n
 C13 220p
 C14 1u
 C15 220n
 C16 6n8
 C17 220n
 C18 33n
 C100 100u
 C101 100u
 C102 100n

TRANSISTORS

Q1 J201
 Q2 J201
 Q3 J201
 Q4 J201
 Q5 J201

DIODES

D100 1N5817


POTENTIOMETERS

VOLUME A100K
 PRES B10K
 GAIN A1M
 TREBLE A25K
 MID B5K
 BASS A100K

TRIM POTS


TRIM1 100K
 TRIM2 100K
 TRIM3 100K
 TRIM4 100K

Boogie Monster

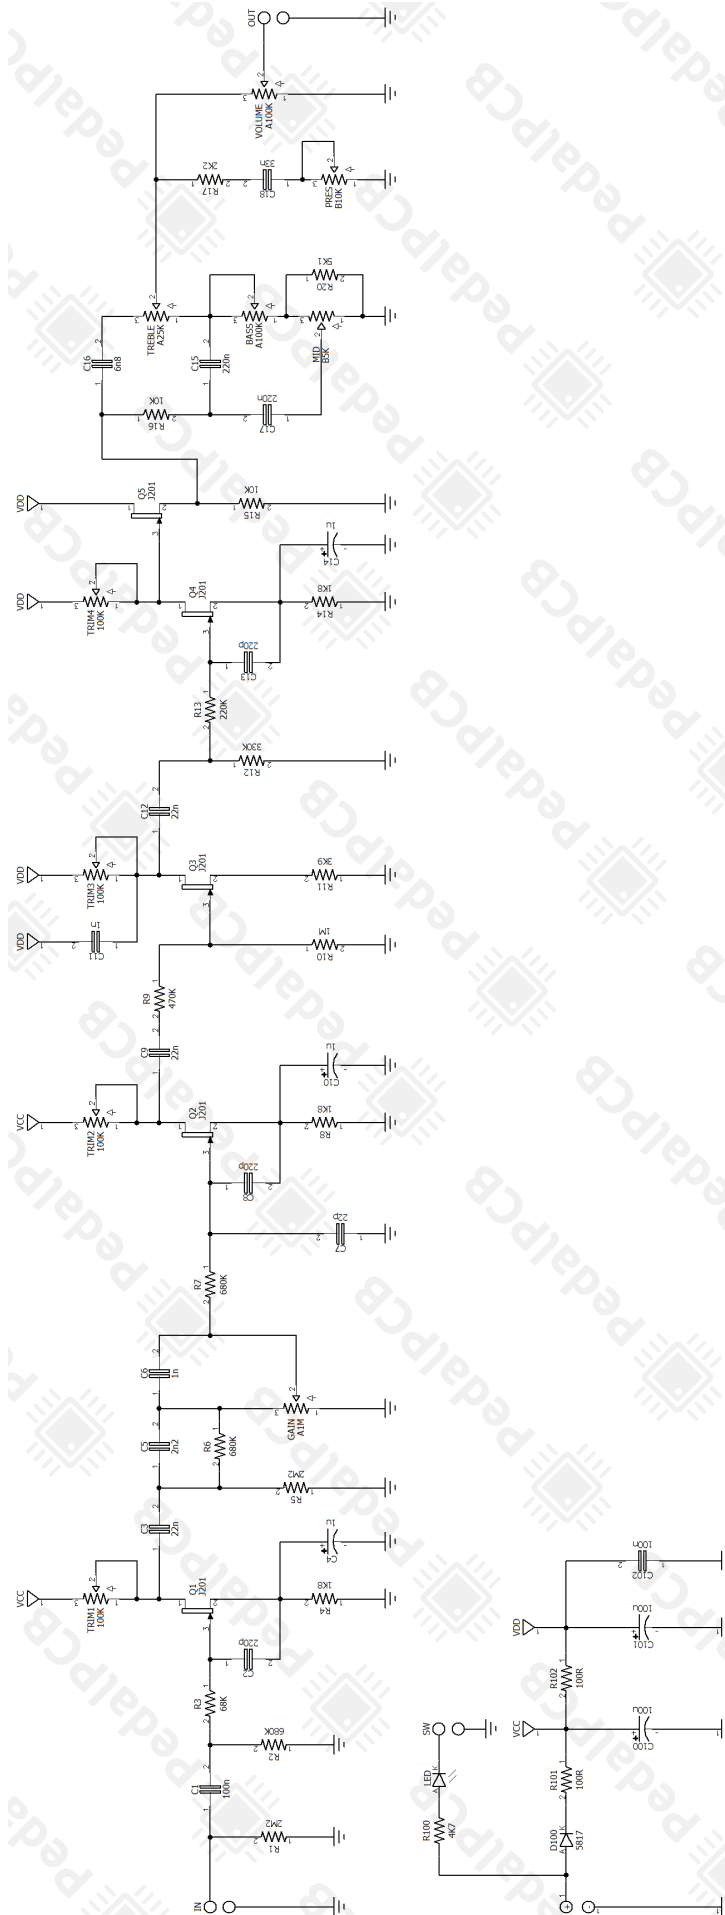

Boogie Monster

Wiring Diagram

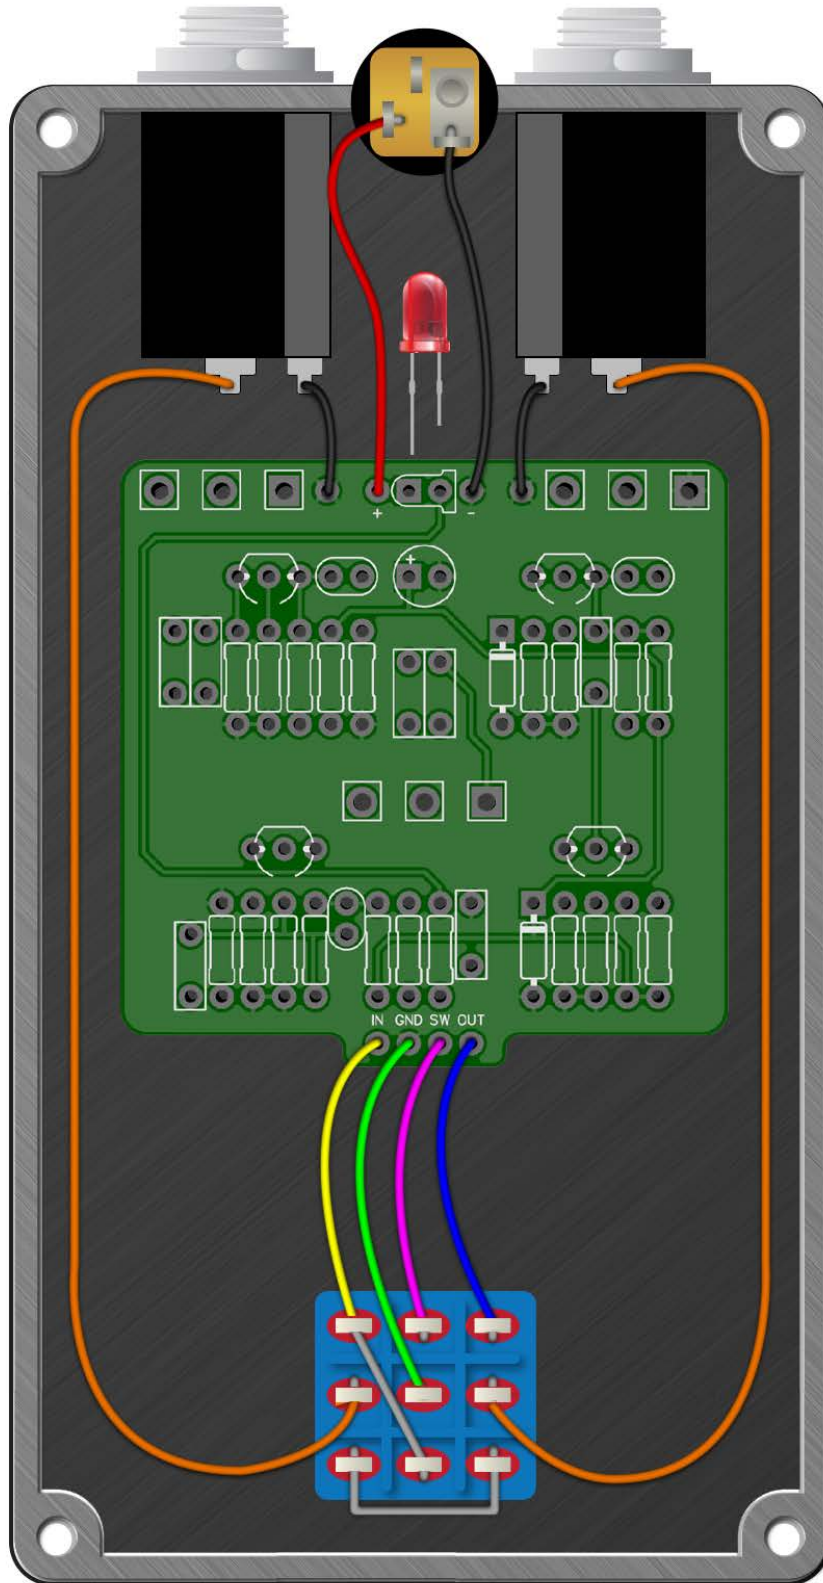

Boogie Monster

Drill Template
125B Enclosure

