




PedalPCB

Lenora Boost

Revision 05.04.20

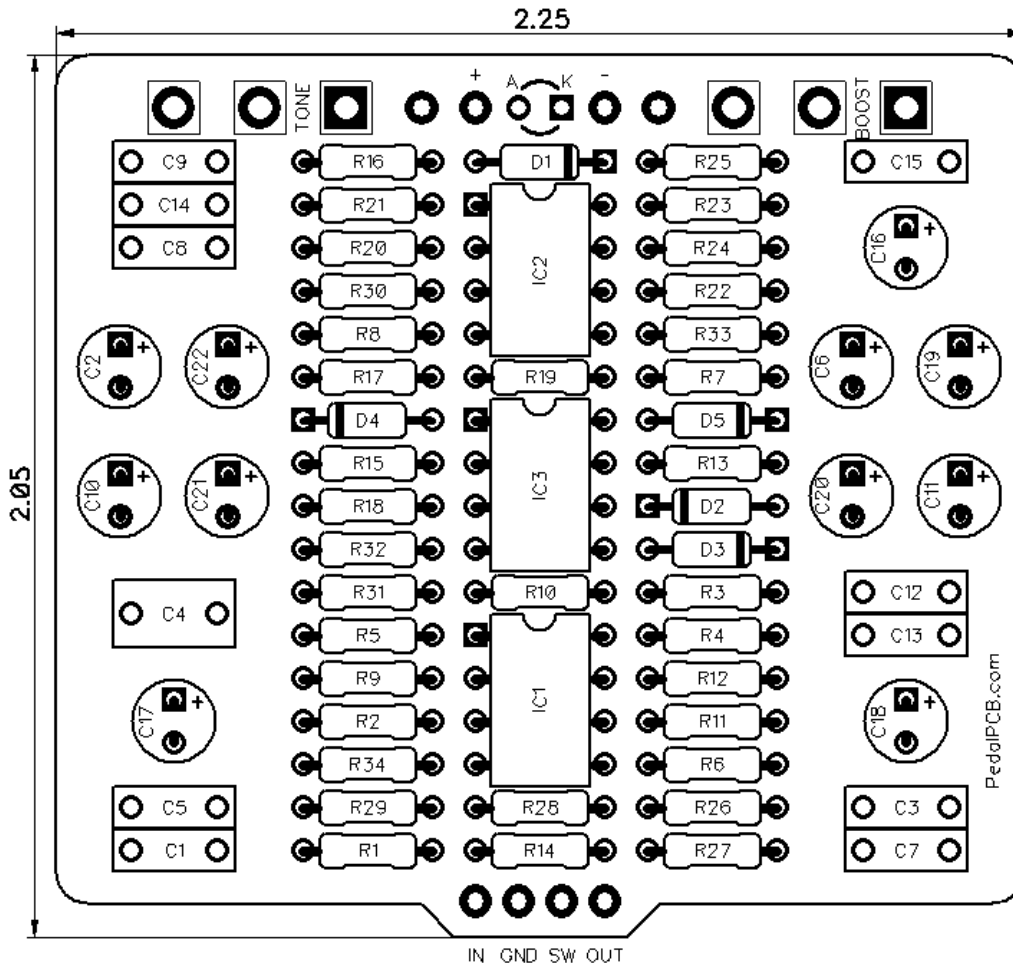

Controls

- Boost
- Tone

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 10K
R2 1M
R3 100K
R4 560R
R5 5K1
R6 10K
R7 1K5
R8 1K5
R9 1K
R10 2K
R11 15K
R12 422K
R13 1K
R14 4K7
R15 22K
R16 47K
R17 27K
R18 12K
R19 15K
R20 392K
R21 1K8
R22 100K
R23 4K7
R24 100K
R25 560R
R26 68K
R27 68K
R28 100K
R29 27K
R30 27K
R31 3K3
R32 100K
R33 3K3
R34 100K

CAPACITORS

C1 100n
C2 47u
C3 100n
C4 390n
C5 68n
C6 1u
C7 68n
C8 27n
C9 2n2
C10 1u
C11 1u
C12 390p
C13 82n
C14 820p
C15 3n9
C16 4u7
C17 4u7
C18 47u
C19 1u
C20 1u
C21 1u
C22 1u

INTEGRATED CIRCUITS

IC1 TL072
IC2 TL072
IC3 TC1044SCPA


DIODES

D1 1N5817
D2 SH270
D3 SH270
D4 1N4001
D5 1N4001

POTENTIOMETERS

BOOST B10K
TONE B10K

Lenora Boost

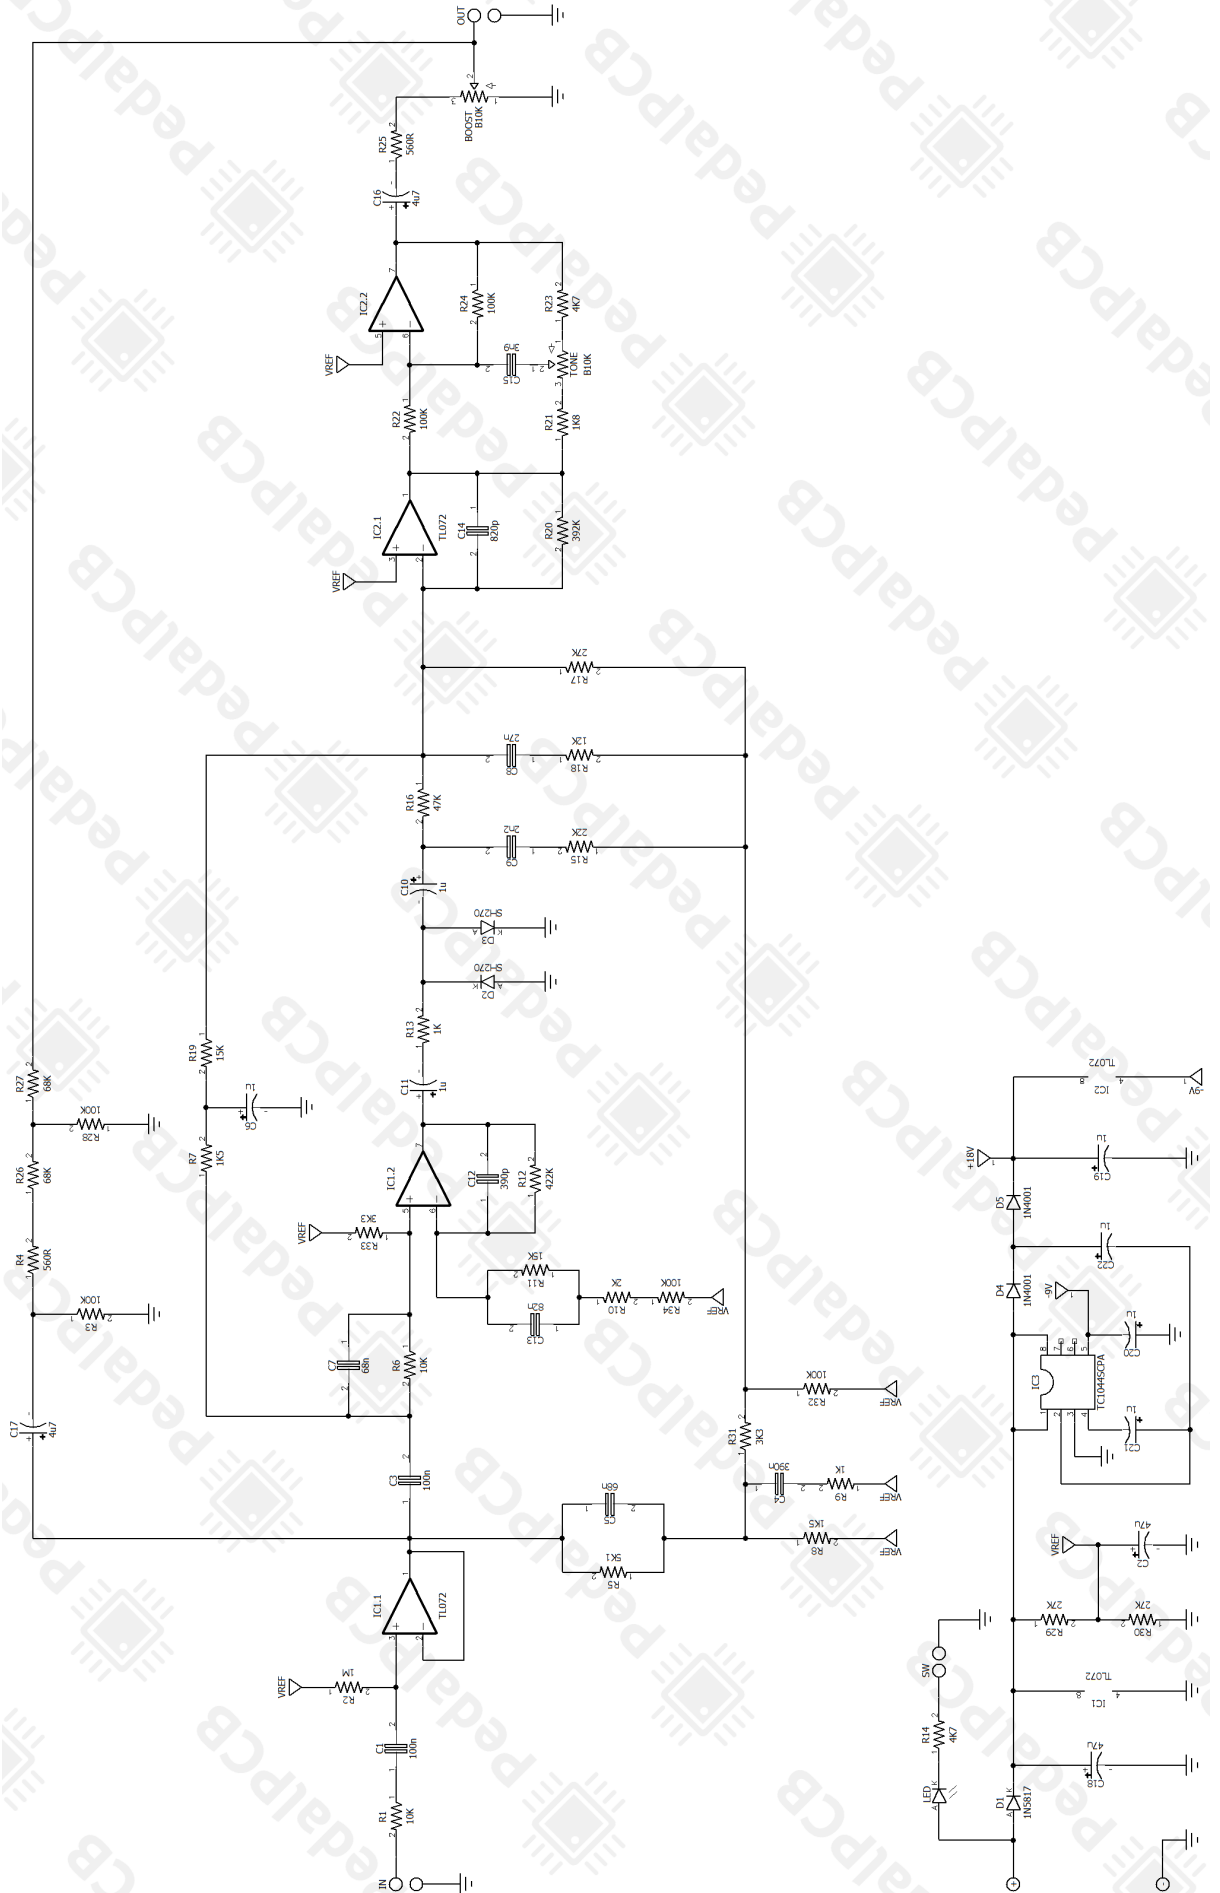

Lenora Boost

Wiring Diagram



Lenora Boost

Drill Template
125B Enclosure

