




PedalPCB

Dwarven Hammer

Revision 12.29.20

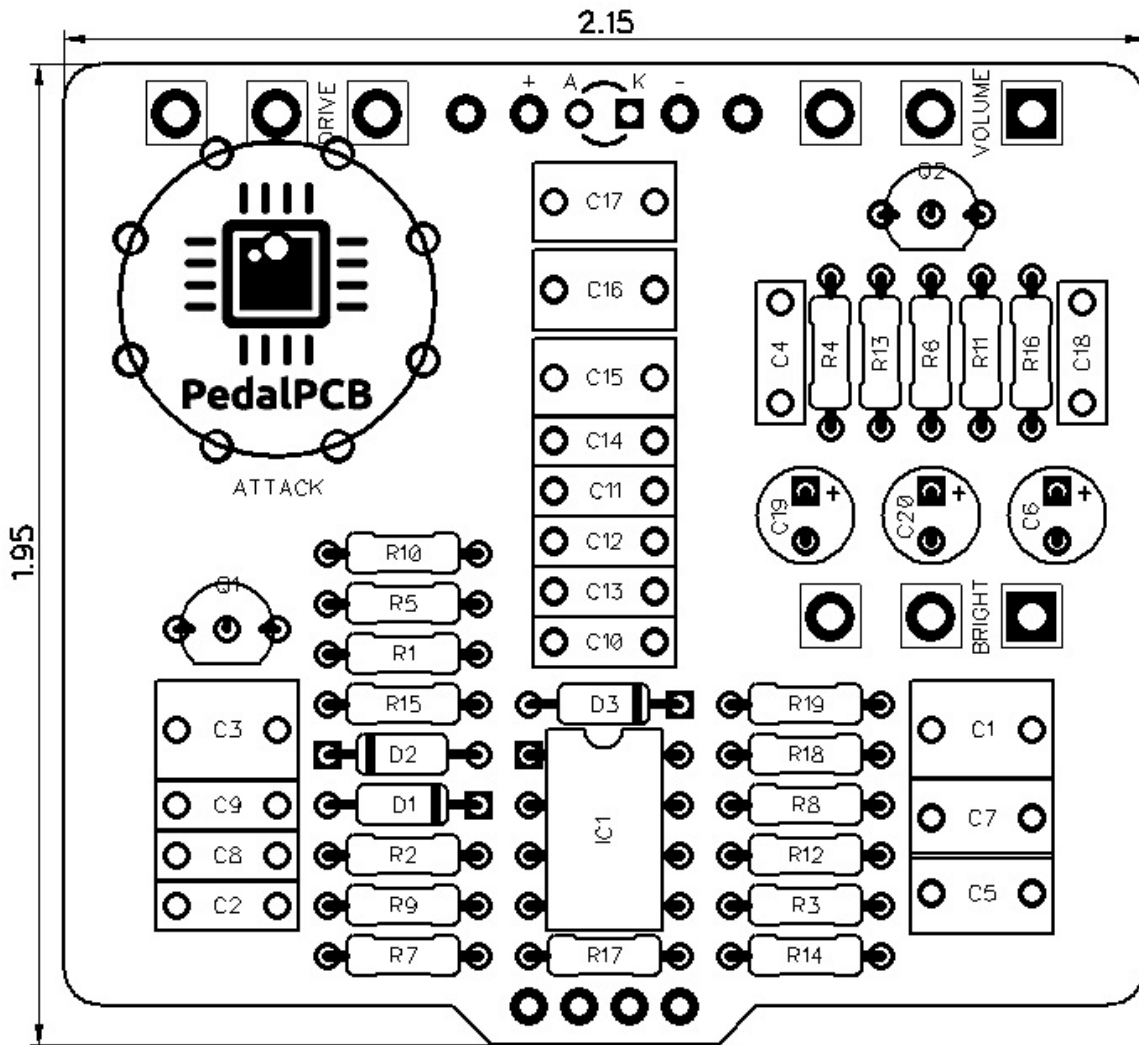

Controls

- Volume
- Drive
- Bright
- Attack (Rotary Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 510K
R2 10K
R3 10K
R4 1K
R5 1K
R6 510K
R7 1K
R8 3K9
R9 1M
R10 10K
R11 100R
R12 220R
R13 10K
R14 10K
R15 10K
R16 1K
R17 4K7
R18 10K
R19 10K

CAPACITORS

C1 1u
C2 27n
C3 1u
C4 100n
C5 220n
C6 10u
C7 220n
C8 47p
C9 120p
C10 33n
C11 47n
C12 68n
C13 82n
C14 100n
C15 220n
C16 330n
C17 470n
C18 100n
C19 100u
C20 47u

INTEGRATED CIRCUITS

IC1 JRC4558DD

TRANSISTORS

Q1 2N3904
Q2 2N3904

DIODES

D1 1N4148
D2 1N4148
D3 1N5817


POTENTIOMETERS

VOLUME A100K
DRIVE A500K
BRIGHT B5K

SWITCHES

ATTACK 1P8T Mini Rotary
<https://www.pedalpcb.com/product/mini-1p8t/>

Dwarven Hammer

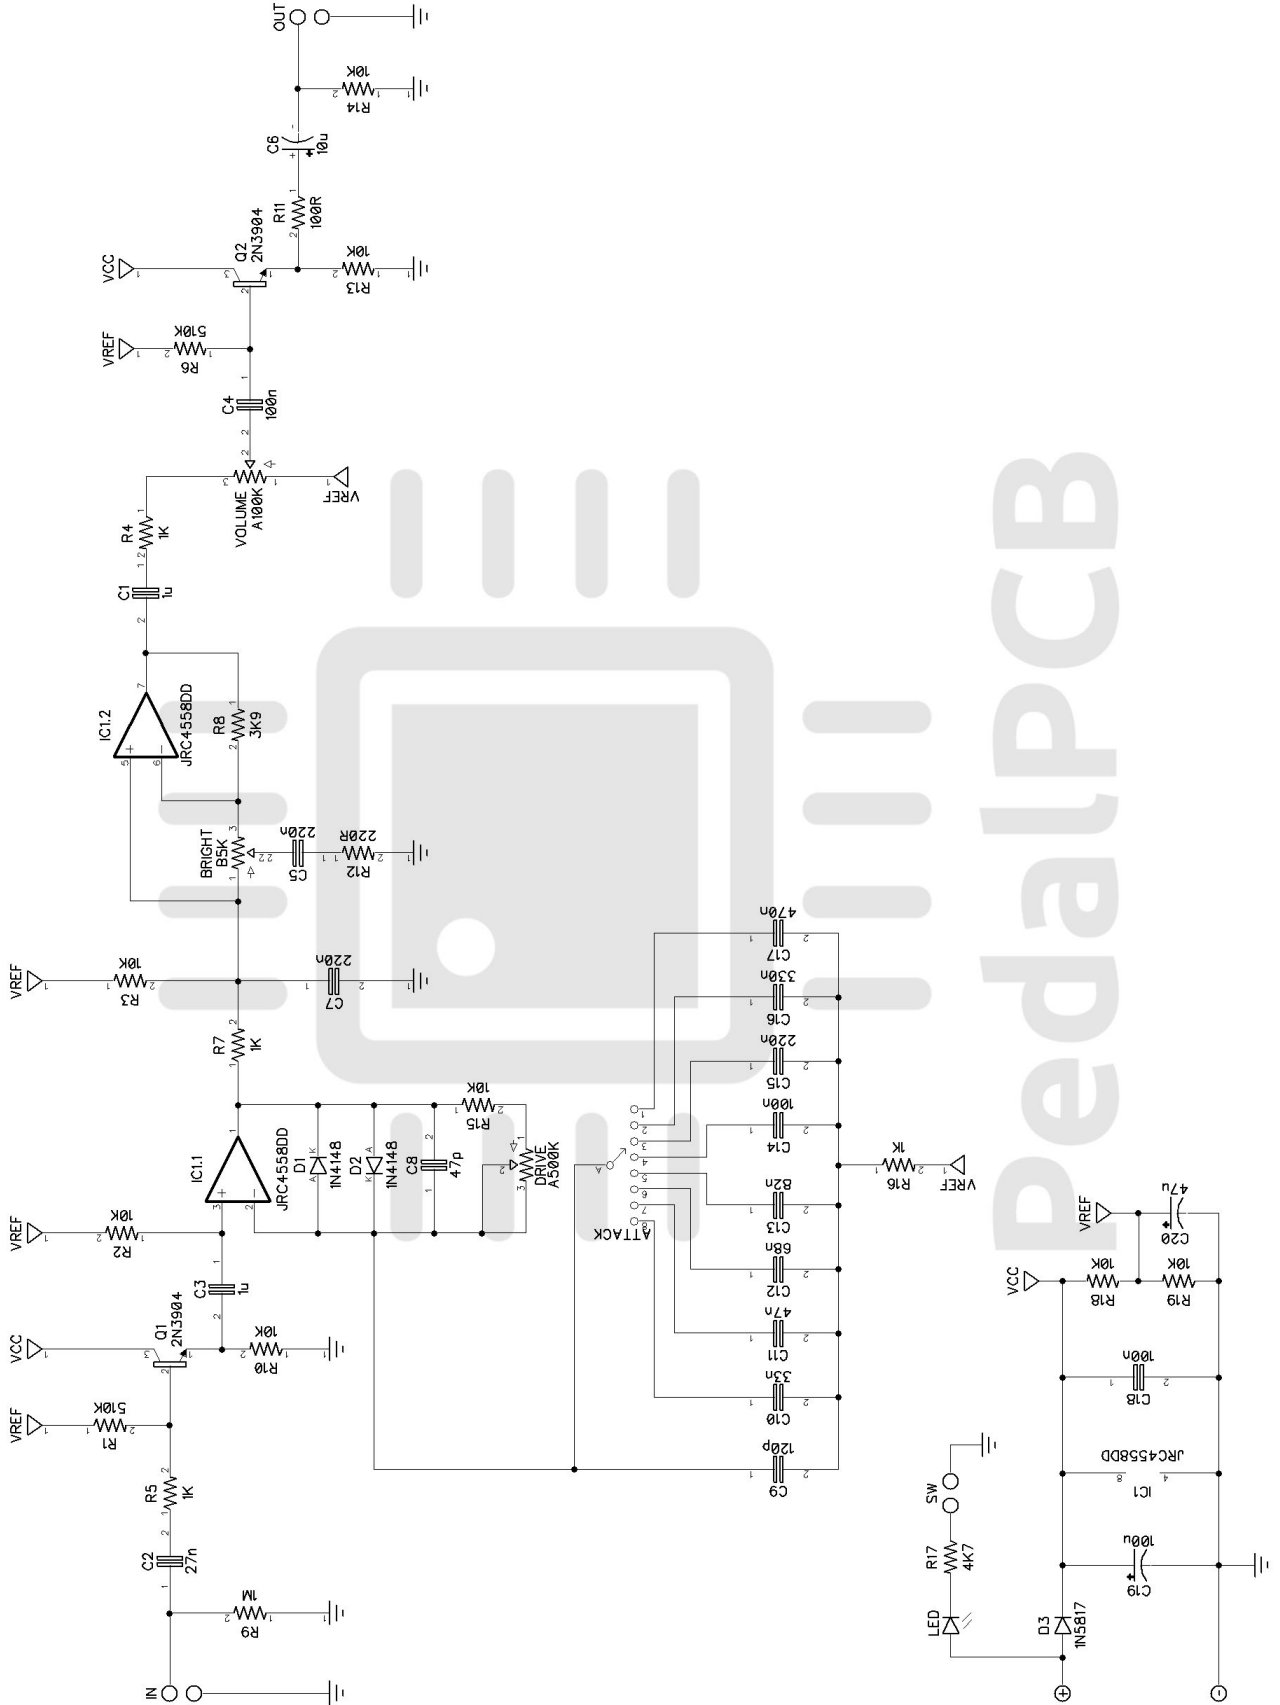

Dwarven Hammer

Wiring Diagram



Dwarven Hammer

Drill Template
125B Enclosure

