


PedalPCB

Bloodshot Overdrive

Revision 12.16.18

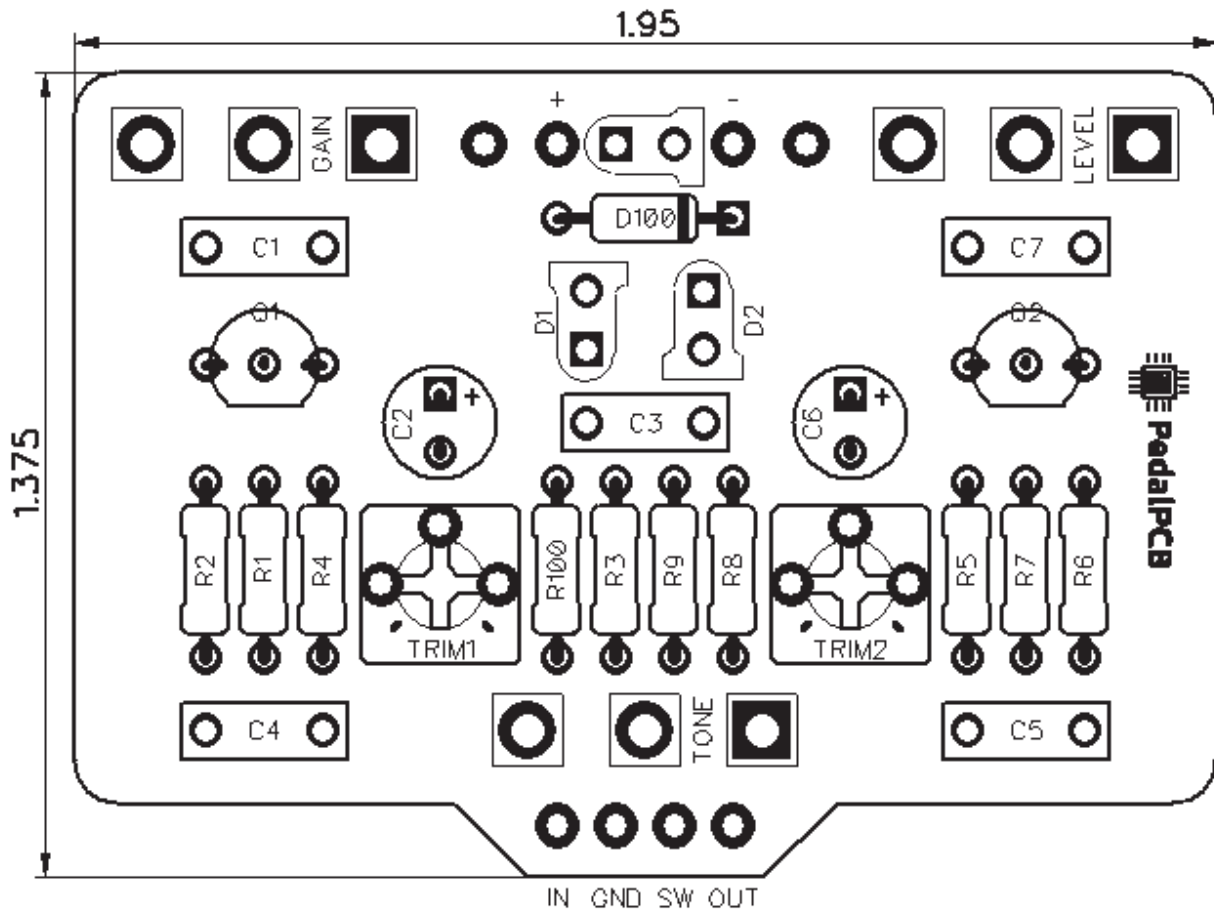

Controls

- Level
- Tone
- Gain

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 1M
R2 1K
R3 39K
R4 33K
R5 68K
R6 1M
R7 2K2
R8 33K
R9 68K
R100 4K7

CAPACITORS

C1 47n
C2 22u
C3 100n
C4 10n
C5 10n
C6 22u
C7 100n

TRANSISTORS

Q1 2N5089
Q2 2N5457

DIODES

D100 1N5817

D1 3mm Red LED
D2 3mm Red LED

POTENTIOMETERS


LEVEL B100K
TONE A100K
GAIN B100K

TRIM POTS (3362P)

TRIM1 10K
TRIM2 10K

Bloodshot Overdrive

Wiring Diagram

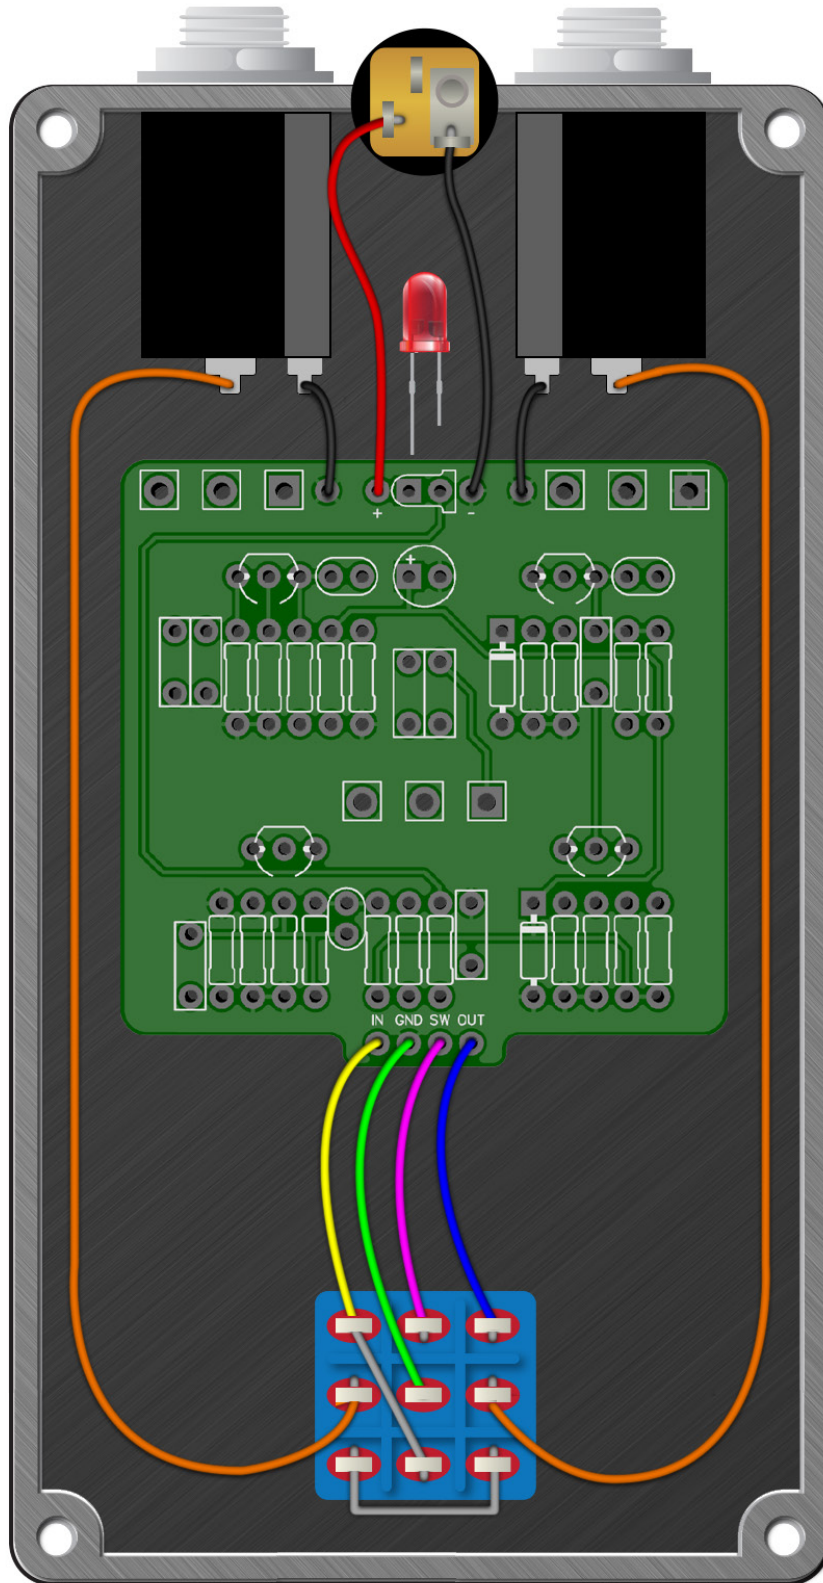

Bloodshot Overdrive

Drill Template
125B enclosure with top mounted jacks

