




# PedalPCB

## Caboose Overdrive

Revision 11.06.19

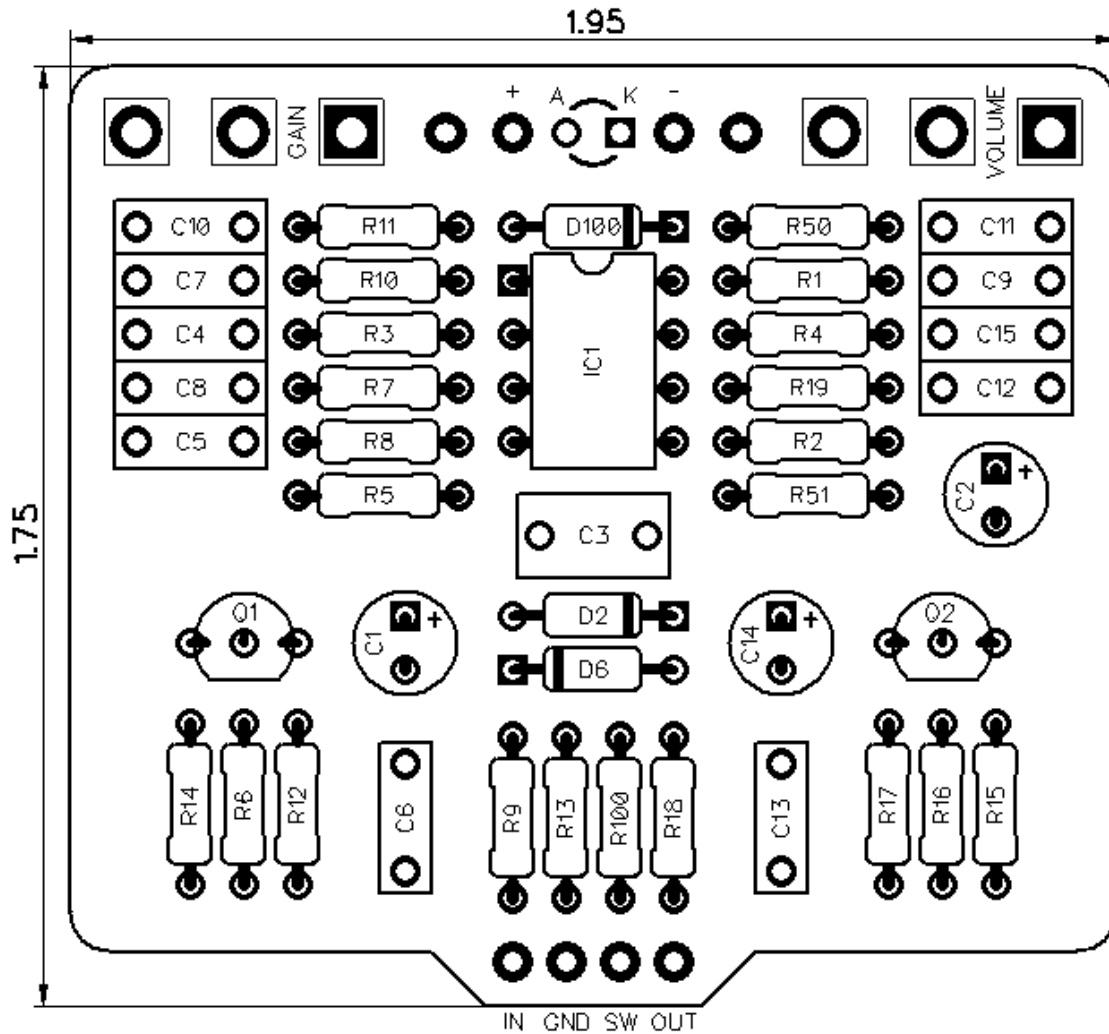

### Controls

- Volume
- Gain

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

**RESISTORS (1/4W)**

R1 10K  
R2 10K  
R3 3K3  
R4 470R  
R5 6K8  
R6 510K  
R7 100K  
R8 2K2  
R9 1K  
R10 2K2  
R11 6K8  
R12 22K  
R13 2M2  
R14 10K  
R15 68K  
R16 470R  
R17 12K  
R18 2M2  
R19 1K  
R50 27K  
R51 27K  
R100 4K7

**CAPACITORS**

C1 47u  
C2 47u  
C3 220n  
C4 220p  
C5 27n  
C6 47n  
C7 100n  
C8 47n  
C9 100n  
C10 10n  
C11 150n  
C12 47n  
C13 100n  
C14 10u  
C15 100n

**TRANSISTORS**

Q1 2N5088  
Q2 J201

**INTEGRATED CIRCUITS**

IC1 JRC4558


**DIODES**

D2 1N4148  
D6 1N4148  
D100 1N5817

**POTENTIOMETERS**


VOLUME B50K  
GAIN B250K

# Caboose Overdrive

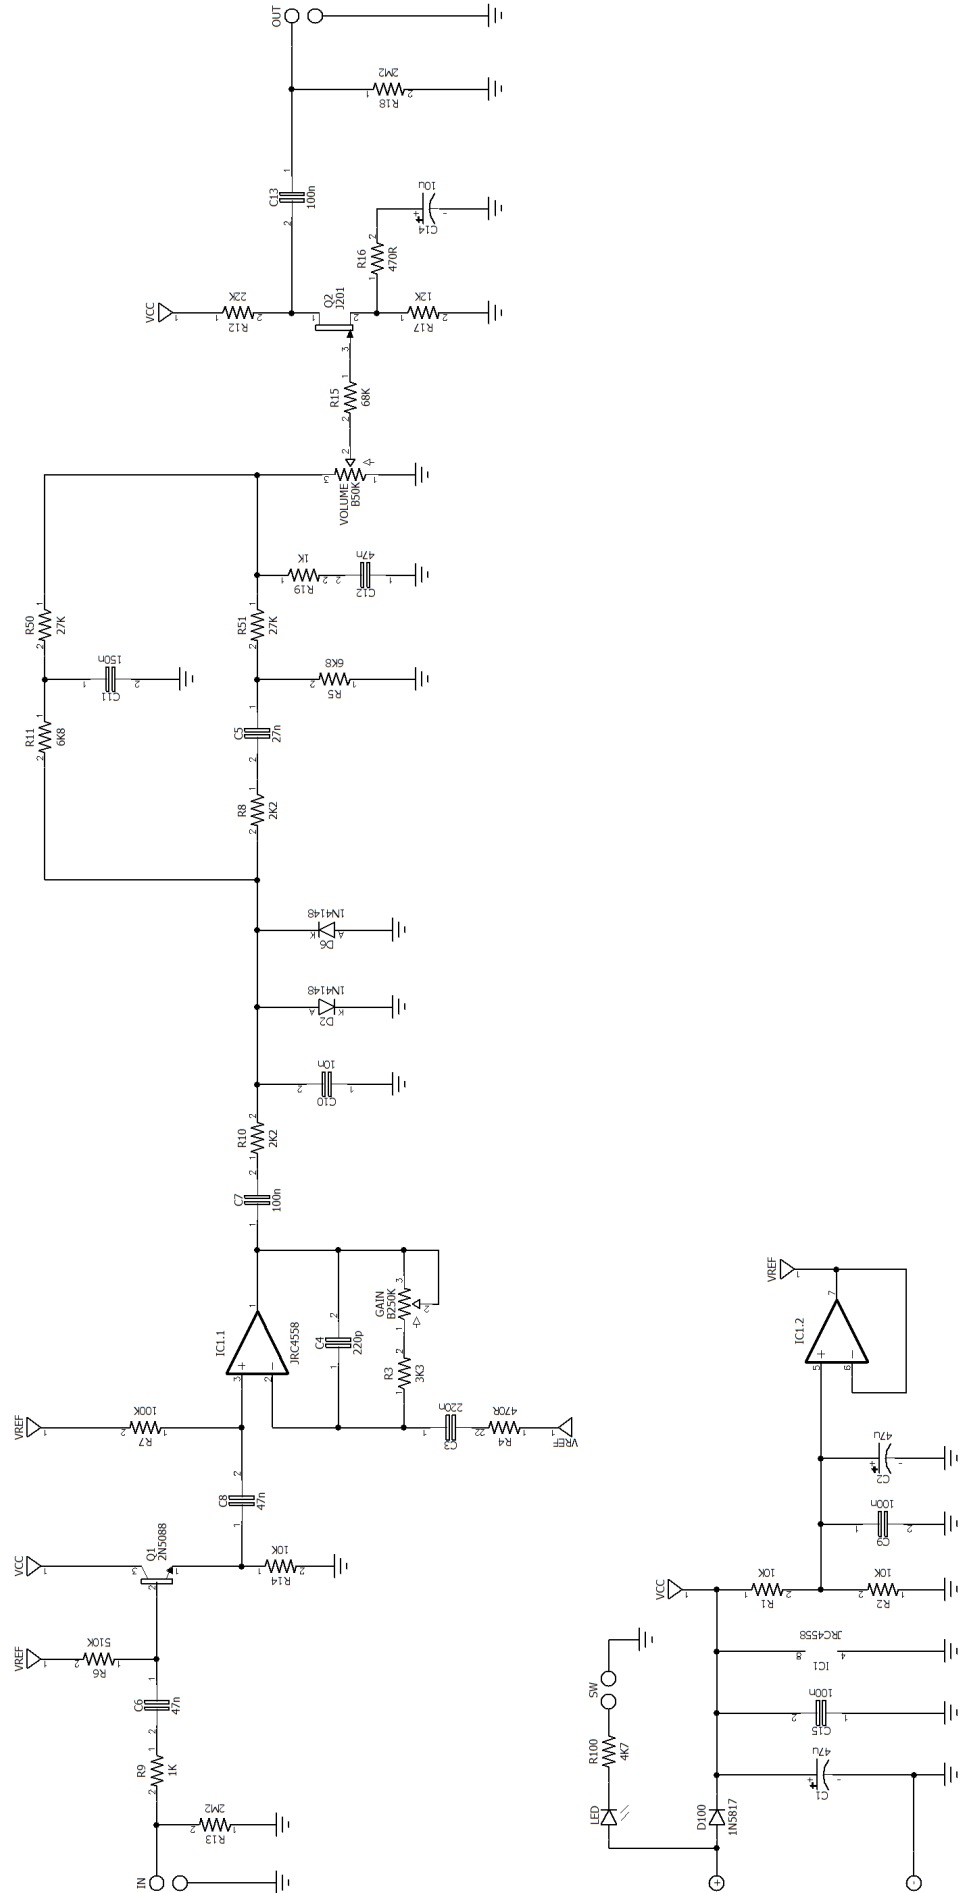

# Caboose Overdrive

Wiring Diagram

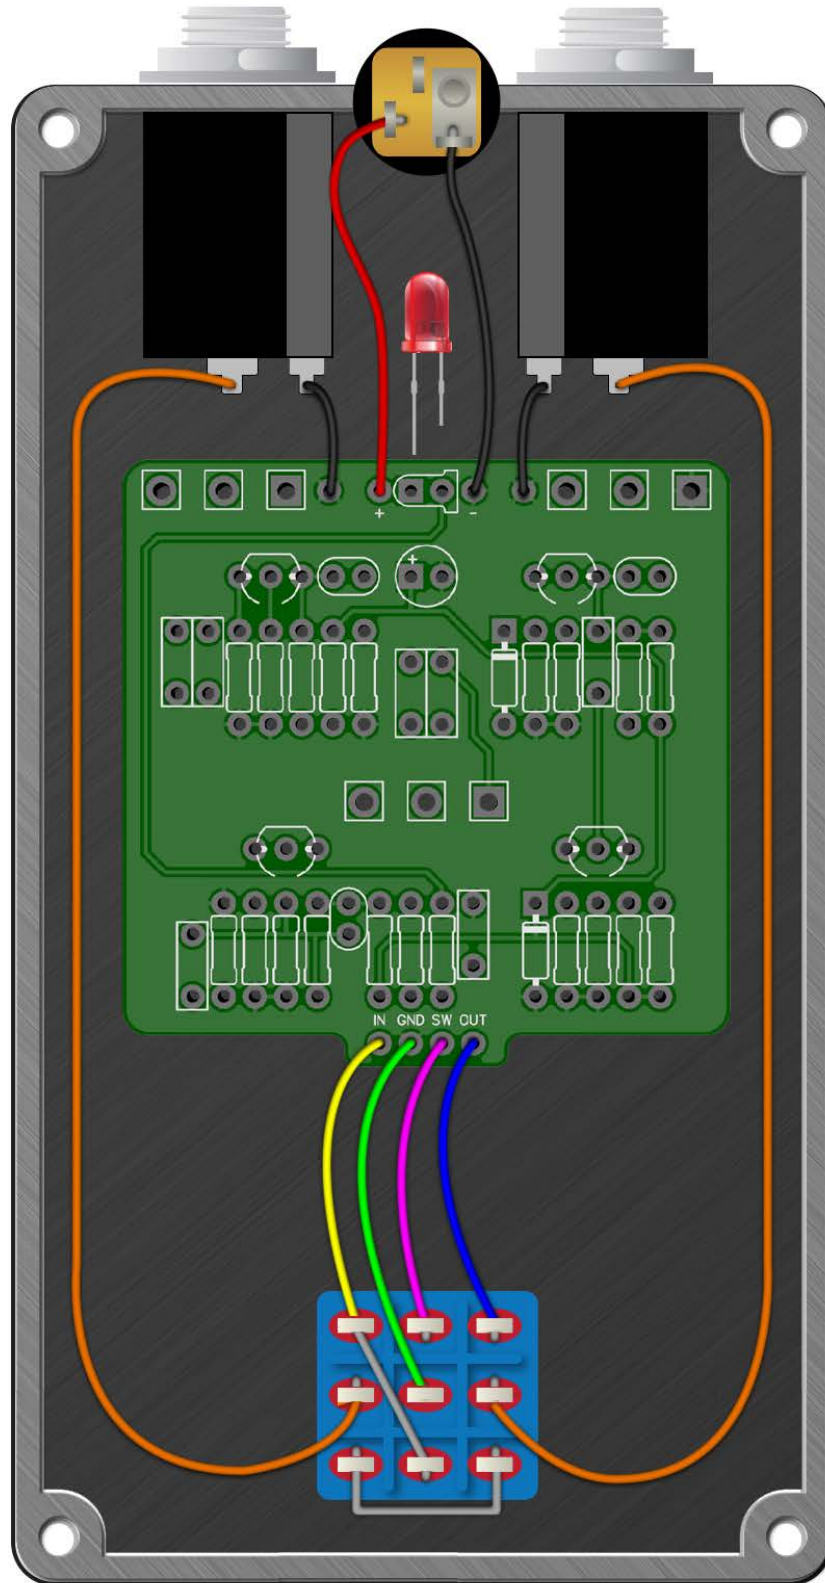

# Caboose Overdrive

Drill Template  
125B Enclosure

