


PedalPCB

Semi-Sweet³ Distortion

Revision 12.27.19

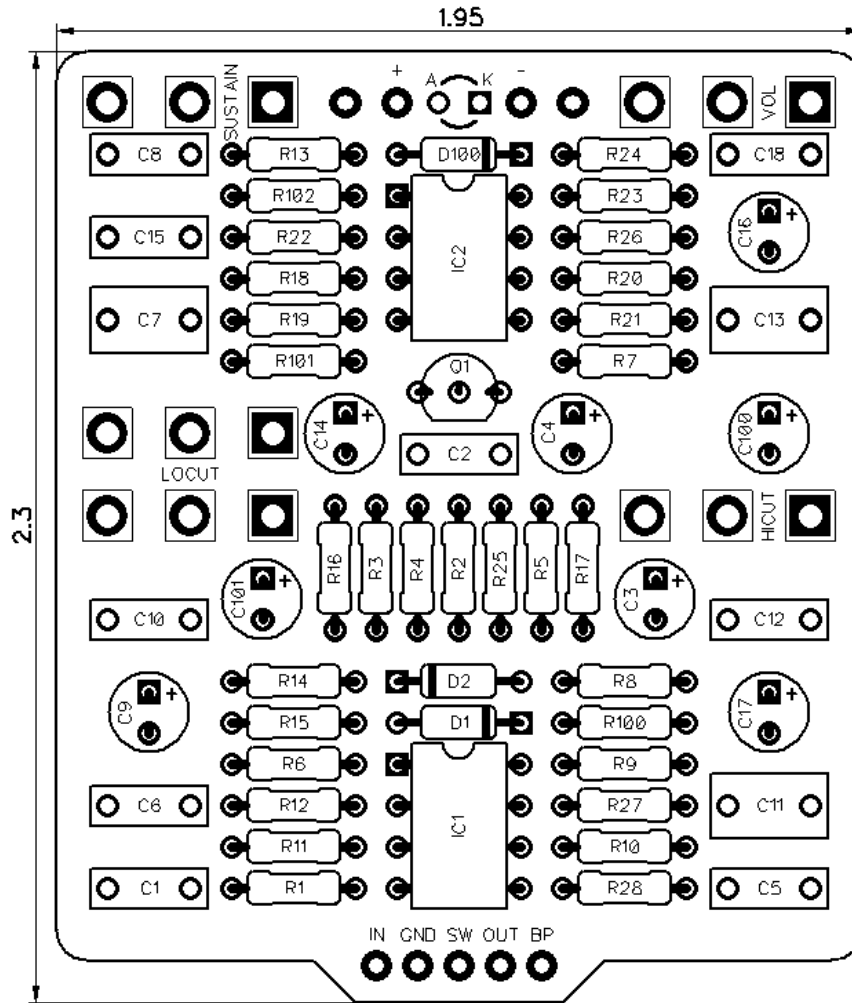

Controls

- Volume
- Sustain
- Hi-Cut
- Lo-Cut

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 10M
R2 1K
R3 120K
R4 7K5
R5 120K
R6 200K
R7 10K
R8 51R
R9 1M
R10 10K
R11 1M
R12 100K
R13 510R
R14 15K
R15 1K5
R16 1K6
R17 1M
R18 10K
R19 1M
R20 1M
R21 2K4
R22 6K8
R23 10K
R24 91R
R25 100R
R26 100R
R27 91R
R28 51K
R100 4K7
R101 150K
R102 180K

CAPACITORS

C1 100n
C2 1n
C3 4u7
C4 22u
C5 10n
C6 220p
C7 470n
C8 3n3
C9 10u
C10 10n
C11 220n
C12 10n
C13 220n
C14 10u
C15 220p
C16 22u
C17 220u
C18 100n
C100 220u
C101 10u

TRANSISTORS

Q1 2N5088

INTEGRATED CIRCUITS

IC1 TL071
IC2 TL071

DIODES


D1 1N34A
D2 1N34A
D100 1N5817

POTENTIOMETERS

VOL A10K
SUSTAIN C50K
HICUT B25K
LOCUT B10K

Semi-Sweet³ Distortion

Wiring Diagram

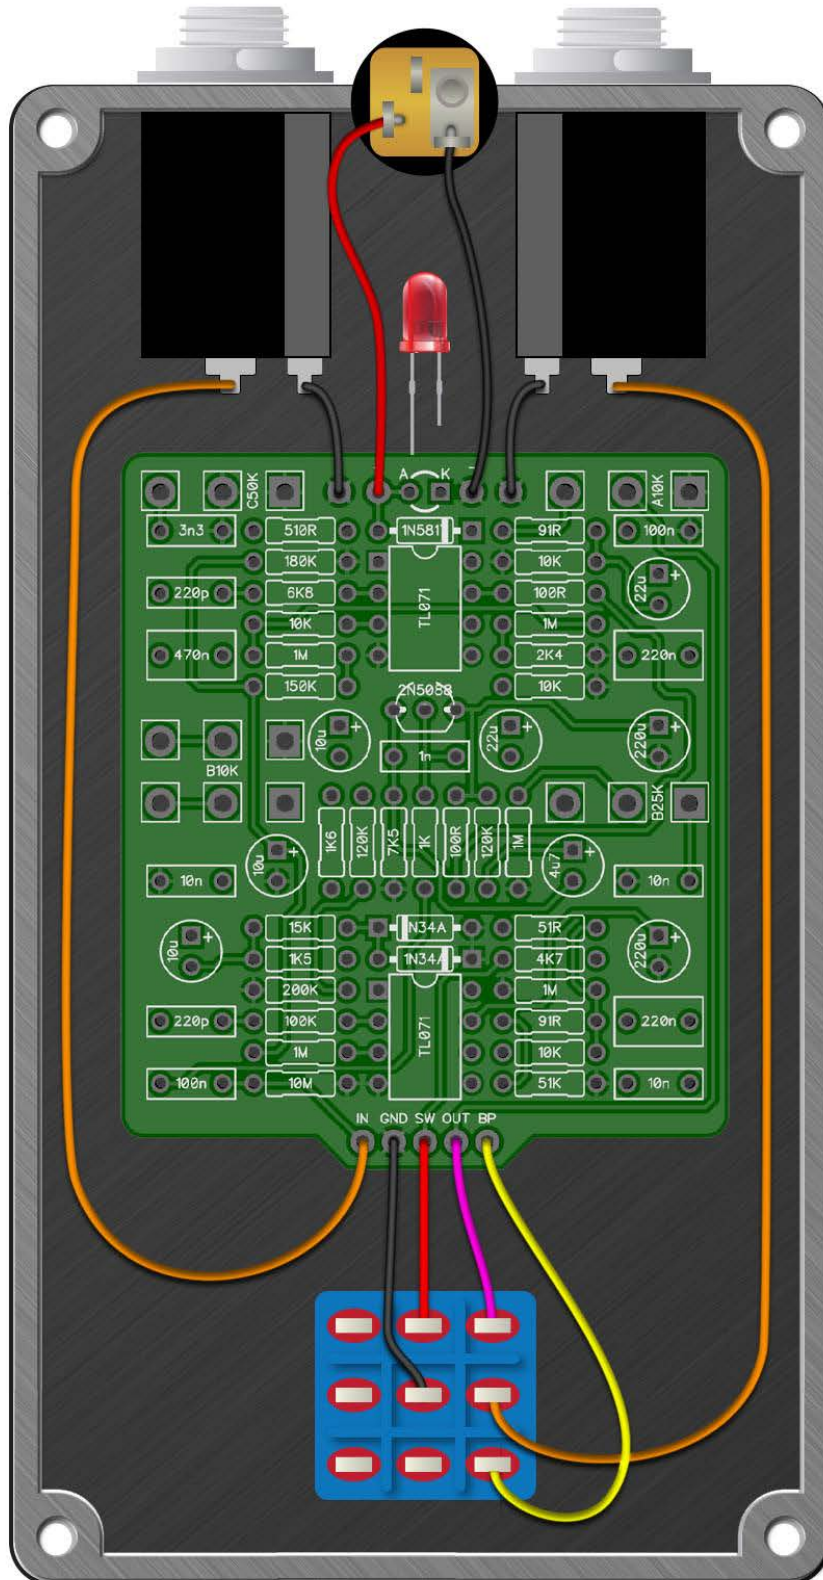

Semi-Sweet³ Distortion

Drill Template
125B Enclosure

