




PedalPCB

Delegate Compressor Boneyard Edition

Revision 12.01.20

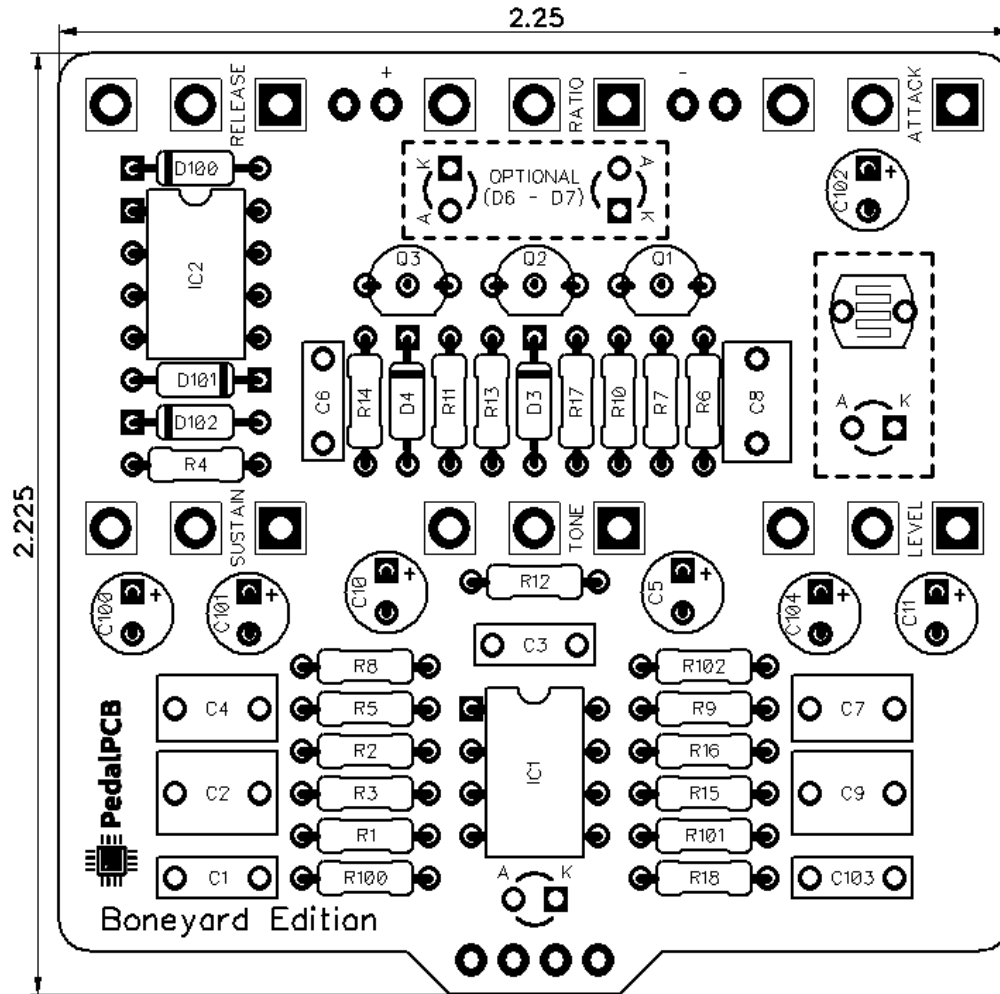

Controls

- Attack
- Sustain
- Release
- Ratio
- Tone
- Level

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

Delegate Compressor

Boneyard Edition

Parts List

RESISTORS (1/4W)

R1 2M2
R2 10K
R3 2M2
R4 10K
R5 2M2
R6 3K3
R7 10K
R8 10K
R9 10K
R10 10K
R11 47K
R12 20K
R13 1M
R14 1M
R15 10K
R16 1K
R17 4K7
R18 100K
R100 4K7
R101 47K
R102 47K

CAPACITORS

C1 100p
C2 100n
C3 100n
C4 100p
C5 1u (Electrolytic)
C6 22n
C7 220n
C8 220n
C9 1u (Film)
C10 47u
C11 1u (Electrolytic)
C100 100u
C101 10u
C102 10u
C103 100n
C104 10u

INTEGRATED CIRCUITS

IC1 OPA2134
IC2 TC1044

TRANSISTORS

Q1 MPSA18
Q2 2N5089
Q3 2N5089

DIODES

D1 3mm Red
D2 3mm Red
D3 1N4148
D4 1N4148
D5 5mm White
D100 1N5817
D101 1N5817
D102 1N5817


POTENTIOMETERS

ATTACK B10K
RATIO B100K
RELEASE B50K
SUSTAIN C1M
TONE B100K
LEVEL A50K

OPTICAL

LDR1 GL5516 LDR (500K Dark)

Delegate Compressor Boneyard Edition

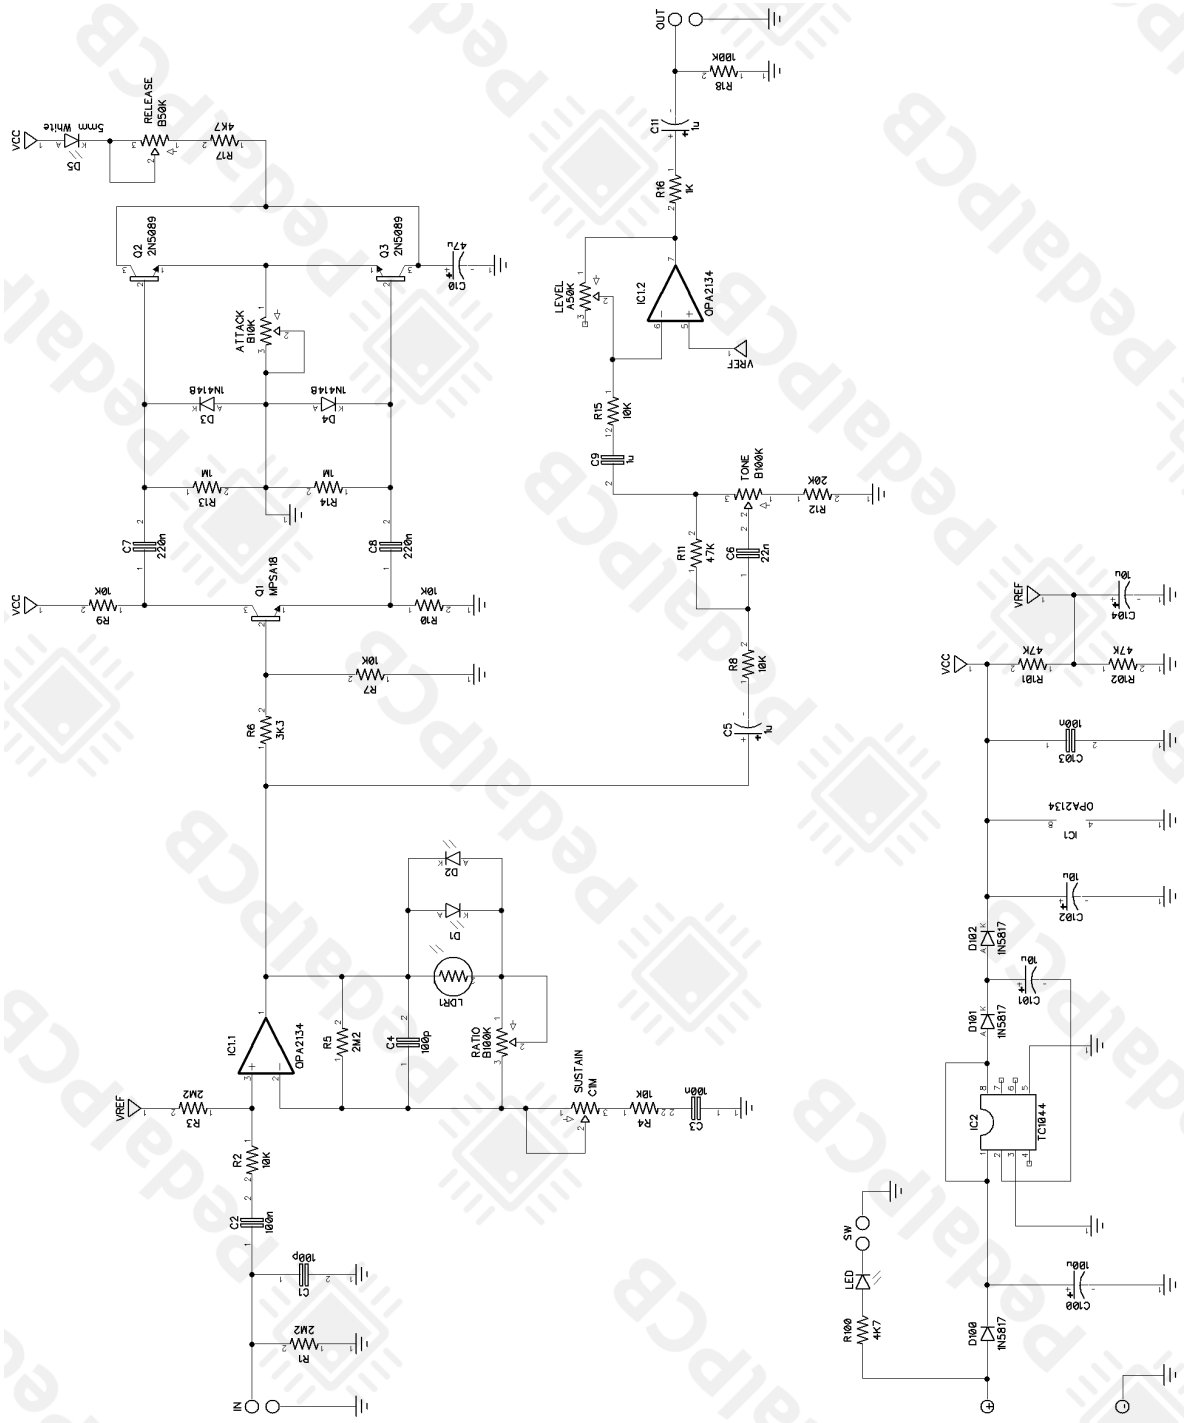

Delegate Compressor

Wiring Diagram



Delegate Compressor

Drill Template
125B enclosure with top mounted jacks

